

DOUBLEWALL DEEP DISPENSER CONTAINMENT

B-8000-B-D-AB / B-D-VAC-AB™ UNIBox
HYDROSTATIC OR VACUUM
MANUFACTURED OF FIBERGLASS

New Extended Adjustable Electronic Monitor Housing (Sensor not included)

Interchangeable dispenser frame allows future dispenser upgrades


New Reinforced Doublewall fiberglass manufacturing process allows liquid fill time to be **measured in minutes!!**

Interstitial fluid: propylene glycol

F-Series Fittings available for Smith and Ameron pipe, including LCX

Ships with Combination Gauge Factory Installed for continuous monitoring

Optional Factory-Installed F-32-TS-DB rigid fiberglass fitting for 3" x 2" Smith or Ameron pipe

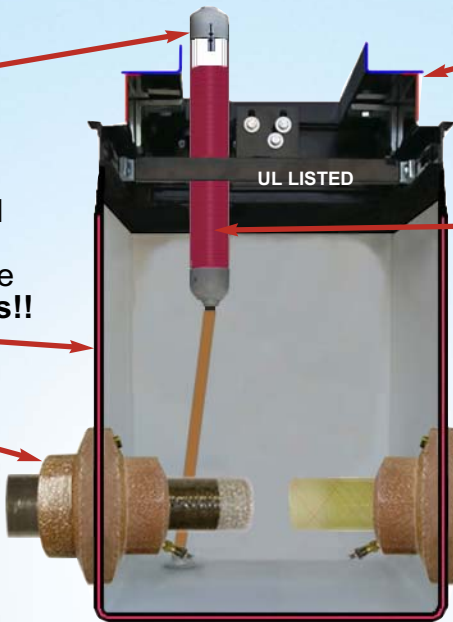

Product Dimensions:

Width:	20"		
Depth:	29"		
Length:	Lrg	Med	Sm
	42"	30"	25.5"

Hydrostatic Model: B-8000-BD-AB-EO
 Vacuum Model: B-8000-BD-VAC-AB-EO



**Eliminate
 Electrical Penetrations!**

Eliminate Potential Leaks!

**Reduces Labor
 & Liability!**

Patent # 6,823,886

Third Party Approved
 AB-2481 Compliant



323/888-4133

S. BRAVO SYSTEMS, INC • 2929 Vail Avenue • Commerce • CA • 90040
 Fax: 323/888-4123 • E-mail: info@sbravo.com • www.sbravo.com

