

SHALLOW STEEL DISPENSER CONTAINMENT SYSTEM WITH FLEXIBLE PENETRATION FITTING **B-2000 B-33**

Featuring the Patented Float-Trip Amplification Mechanism

B-2000 B-33

Pre-located
anchoring system

Flexible Product penetration
fittings with secondary hose
termination

Powder epoxy
coated paint

1 1/2" single poppet
product shear valve

Product valve brackets

12-gauge steel

Patented float-trip shutoff
amplification mechanism

The shallow "Bravo Box" is the world's first and foremost secondary containment system for dispensers. The B-2000 B-33 has flexible penetration fittings for easier adjustment to retrofit conditions

This shallow Bravo Box, is factory equipped with the patented Float-Trip Amplification Mechanism that shuts down the impact valve of the product when approximately 5-oz. of fuel is captured in the float reservoir. All remaining dispensers, as well as the other products in the leaking dispenser continue in operation.

The B-2000's design assures lasting integrity, safety and low-cost retrofitting when a change in dispenser is anticipated.

UL listed system

Rugged steel construction

Factory pre-tested

Fully equipped for contractor-friendly field installation

Compatible with all fuels




323/888-4133

S. BRAVO SYSTEMS, INC • 2929 Vail Avenue • Commerce • CA • 90040
Fax: 323/888-4123 • E-mail: info@sbravo.com • http://www.sbravo.com



B-2000-B-33

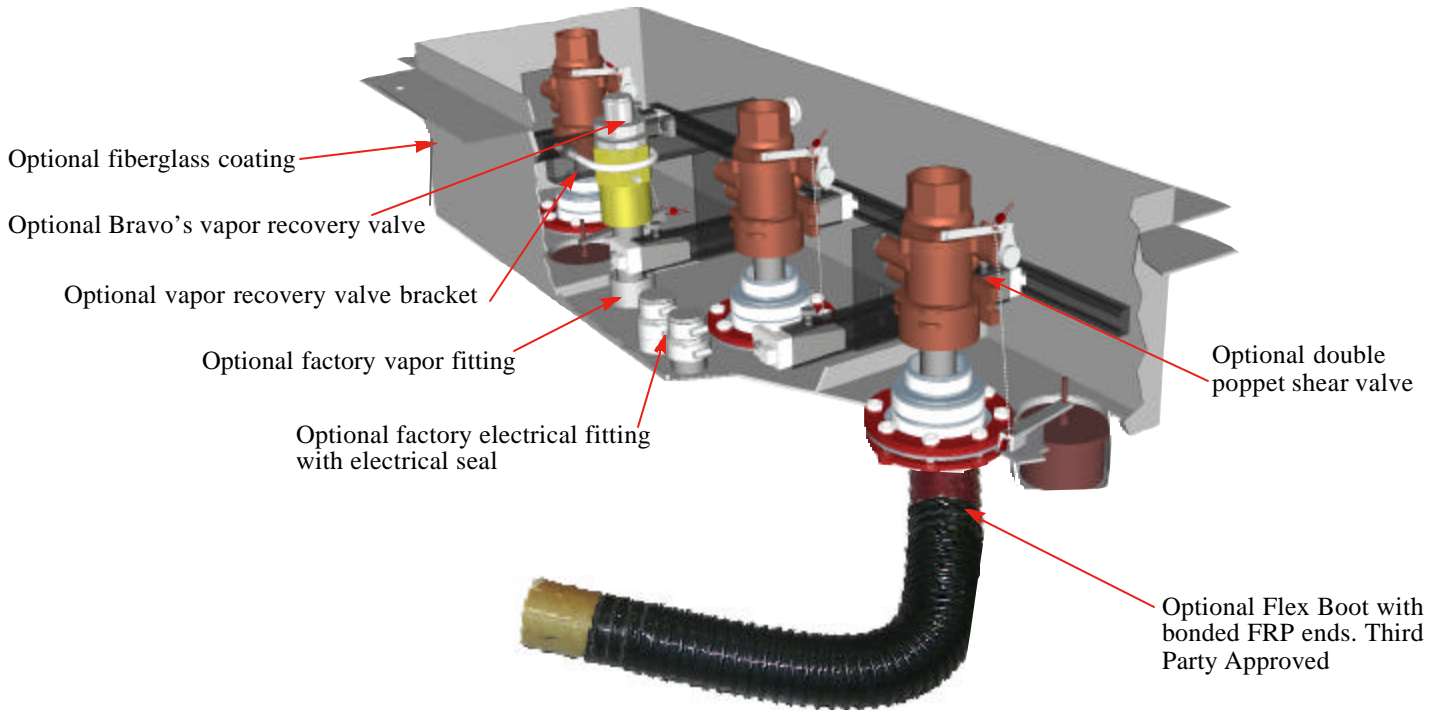

PRODUCT FEATURES:


- Made to spec for any brand or model of dispenser
- Low-cost conversion frame allows economical retrofitting, without removing existing Bravo Box or breaking concrete, when dispenser is upgraded. (optional)
- Standard steel frame functions as an anchoring platform and waterguard
- UL listed powder epoxy coated steel
- 12-gauge steel
- Patented

STANDARD EQUIPMENT:

- Patented float-trip shutoff amplification mechanism
- Product shear valve single poppet
- Product shear valve bracket
- Product penetration fittings
- Powder epoxy coated paint
- 8-3/4" deep

OPTIONAL EQUIPMENT:

- BFH-3-30FRP-A or S CTC Secondary flex boot with Ameron and A.O. Smith pipe bonded with encapsulated S.S. clamp, factory installed (Third Party)
- B-1 vapor recovery shear valve
- BRKT-B1 vapor recovery valve bracket
- FEF-ES-factory electrical fitting with electrical seal
- FVF-NIP factory vapor fitting w/nipple
- DPA-double poppet shear valve adder
- FC-fiberglass coating
- Field installed vapor and electrical fittings

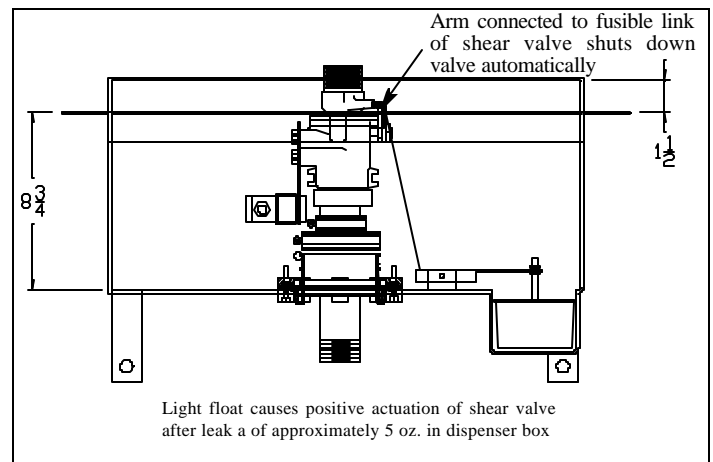

323/888-4133

S. BRAVO SYSTEMS, INC • 2929 Vail Avenue • Commerce • CA • 90040
 Fax: 323/888-4123 • E-mail: info@sbravo.com • http://www.sbravo.com

